AIR QUALITY AND GREENHOUSE GAS STUDY

CONVENIENCE STORE, RETAIL FUEL SALES, & FAST FOOD RESTAURANT 11279 CEDAR AVENUE, BLOOMINGTON, CALIFORNIA SAN BERNARDINO COUNTY

PREPARED FOR:

MR. MANOJ HARIYA
OMNIA DEVELOPMENT SERVICES
4335 EAST LOWELL STREET, SUITE E
ONTARIO, CA 91761

PREPARED BY:

BLODGETT BAYLOSIS ENVIRONMENTAL PLANNING 2211 SOUTH HACIENDA BOULEVARD, SUITE 107 HACIENDA HEIGHTS, CALIFORNIA

MAY 21, 2020

SBCO 002

CONVENIENCE STORE, RETAIL G	SASOLINE SALES, & DRIVE THROUGH 11279 CEDAR AVENUE ● BLOO	I FAST-FOOD RESTAURANT • . MINGTON, SAN BERNARDINO	Air Quality & Greenhouse Gas County	STUDY
Тн	IIS PAGE HAS BEEN IN	TENTIONALLY LE	EFT BLANK.	

TABLE OF CONTENTS

Section	ion	Page
1.	Introduction & Project Description	5
2.	Project Site Location & Setting	5
3.	Air Quality Analysis	9
4.	Greenhouse Gas Emissions Analysis	17
5.	Summary & Conclusions	20

Convenience Store, Retail Gasoline Sales, & Drive Through Fast-food Restaurant ◆ Air Quality & Greenhouse Gas Studies Studi	Y
THIS PAGE HAS BEEN INTENTIONALLY LEFT BLANK.	

1. Introduction & Project Description

The purpose of this report is to provide an air quality and greenhouse gas study related to the construction and subsequent operation of a convenience store, retail gasoline sales area consisting of eight pumps, and a fast-food restaurant on a 2.32-acre site located in the unincorporated community of Bloomington. The proposed project will consist of a gasoline sales area that would feature eight fuel pumps, a convenience store, an automated carwash, a drive-thru restaurant, and a small storage building. The convenience store would have a total floor area of 5,000 square feet, and would include a sales area and quick service restaurant (QSR) area inside the store. The proposed fast-food and drive through restaurant would have a total floor area of 2,550 square feet. The automated carwash tunnel would consist of 2,634 square feet. Finally, a 2,244 square foot storage building would be located in the site's northwest corner. The site would also include a retail fuel sales area consisting of eight (8) pumps with a total of sixteen (16) fueling positions. This fuel sales area would be located under a canopy near the corner of Jurupa Road and Cedar Avenue.

The project site consists of a single undeveloped parcel that encompasses a total of 2.32 acres. The project site is located at the northeast corner of Jurupa Avenue and Cedar Avenue. The site's legal address is 11279 Cedar Avenue. The site's corresponding Assessor Parcel Number (APN) is 0257-101-09. This report consists of the following sections:

- Section 1 Introduction & Project Description, provides an overview of the report's format and content, and summarizes the proposed project.
- Section 2 Project Site Location & Setting, includes a description of the project site's location and its environmental setting.
- Section 3 Air Quality Analysis, evaluates the potential air quality impacts associated with the construction and subsequent occupancy of the proposed project. The analysis considers both the short-term (construction-related) and long-term (operational) air quality impacts.
- Section 4 Greenhouse Gas (GHG) Emissions Analysis, discusses the potential GHG emissions impacts associated with the proposed project's construction and subsequent occupancy.
- Section 5 Summary & Conclusions, includes a summary of the project and analysis and presents the findings of the analysis.

2. PROJECT SITE LOCATION & ENVIRONMENTAL SETTING

The project site is located within the southwestern portion of San Bernardino County, on the northeast corner of Cedar Avenue and Jurupa Avenue located in the unincorporated community of Bloomington. The site is located north of Jurupa Avenue and east of Cedar Avenue. The property is located approximately 1.3 miles south of the San Bernardino Freeway (I-10) via Cedar Avenue. The project site is located at the northeast corner of Jurupa Avenue and Cedar Avenue. The site's legal address is 11279 Cedar Avenue while the corresponding Assessor Parcel Number (APN) is 0257-101-09. The location of the Community of Bloomington in a regional context is shown in Exhibit 1, a local map is provided in Exhibit 2, and an aerial map is provided in Exhibit 3.

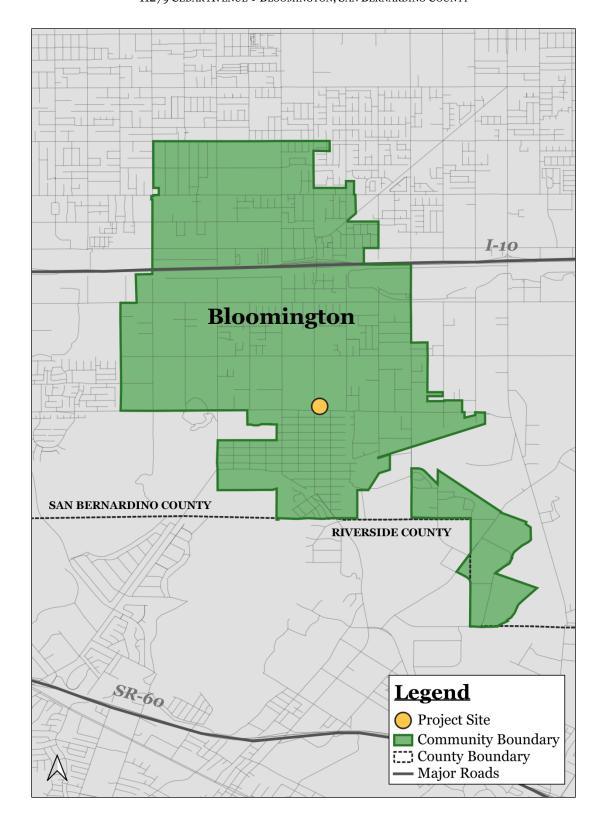


EXHIBIT 1
REGIONAL LOCATION MAP

Source: Blodgett Baylosis Environmental Planning

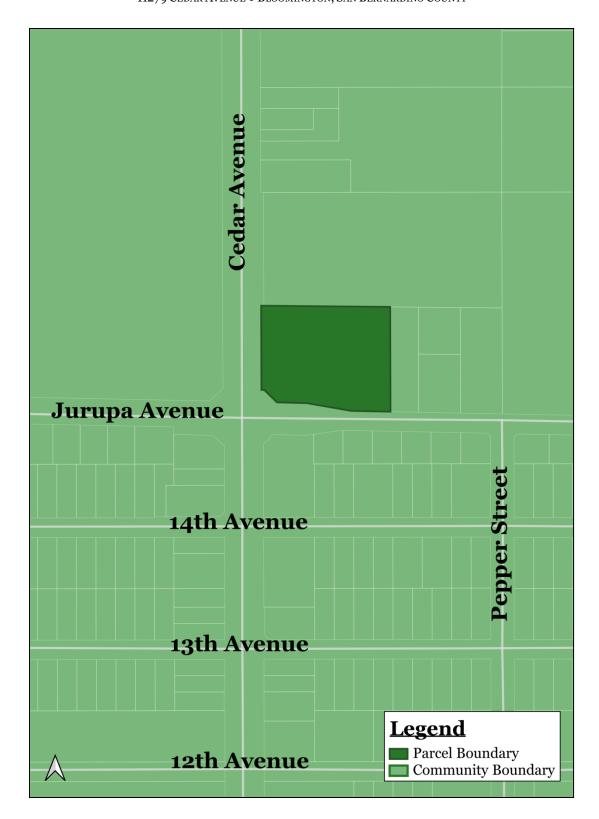


EXHIBIT 2 LOCAL MAP

Source: Blodgett Baylosis Environmental Planning



EXHIBIT 3 AERIAL MAP

Source: Blodgett Baylosis Environmental Planning

The project site is currently vacant though it has been graded and hydro-seeded to prevent erosion. The surrounding land uses are described in detail below:²

- *North of the site.* A trucking yard, RWI Transportation, is located to the north of the property. This business is located at 11205 Cedar Avenue.
- South of the site. Jurupa Avenue extends along the site's south side. Further south, on the south side of Jurupa Avenue, is a commercial land use (Little Truck Sales, 11311 Cedar Avenue). Residential uses are located further east.
- *East of the site*. Residential uses are located to the east of the site. The Crestview Elementary School is located approximately 600 feet to the east of the site.
- West of the site. Cedar Avenue extends along the project site's west side. Further west of Cedar Avenue, is the Bloomington Business Center.³

3. AIR QUALITY ANALYSIS

3.1 THRESHOLDS OF SIGNIFICANCE

According to Appendix G of the CEQA Guidelines, a project may be deemed to have a significant environmental impact on air quality if it results in any of the following:

- A conflict with the obstruction of the implementation of the applicable air quality plan;
- A violation of an air quality standard or contribute substantially to result in a cumulatively considerable net increase in an existing or projected air quality violation;
- The exposure of sensitive receptors to substantial pollutant concentrations; or,
- The result in substantial emissions (such as odors or dust) adversely affecting a substantial number of people.

The South Coast Air Quality Management District (SCAQMD) has established quantitative thresholds for short-term (construction) emissions and long-term (operational) emissions for the following criteria pollutants:

- $Ozone(O_3)$ is a nearly colorless gas that irritates the lungs, damages materials, and vegetation. Ozone is formed by a photochemical reaction when nitrogen dioxide is broken down by sunlight.
- Carbon monoxide (CO) is a colorless, odorless toxic gas that interferes with the transfer of oxygen to the brain and is produced by the incomplete combustion of carbon-containing fuels emitted as vehicle exhaust.

² Blodgett Baylosis Environmental Planning. Site survey. Survey was conducted on December 30, 2019.

³ Google Earth. Website Accessed April 25, 2020.

- *Nitrogen dioxide* (*NO*₂) is a yellowish-brown gas, which at high levels can cause breathing difficulties. NO₂ is formed when nitric oxide (a pollutant from internal combustion) combines with oxygen.
- Sulfur dioxide (SO₂) is a colorless, pungent gas formed primarily by the combustion of sulfurcontaining fossil fuels. Health effects include acute respiratory symptoms and difficulty in breathing for children.
- *PM*₁₀ and *PM*_{2.5} refers to particulate matter less than ten microns and two and one-half microns in diameter, respectively. Particulates of this size cause a greater health risk than larger-sized particles since fine particles can more easily cause irritation.
- Lead is a naturally occurring heavy metal found in the environment as well as being derived from certain products. The major sources of lead emissions have historically included motor vehicle fuels and various industrial sources. Due to the phasing out of leaded gasoline and lead based paints, metal processing is now the primary source of lead emissions to the air. High levels of lead in the air are typically only found near lead smelters, waste incinerators, utilities, and lead-acid battery manufacturers. Exposure to lead can adversely affect the physical development of infants.

In addition to the aforementioned criteria pollutants, toxic air contaminants (TACs) are another group of pollutants of concern. The California Health and Safety Code (HSC) Section 39655 defines a toxic air contaminant as "an air pollutant which may cause or contribute to an increase in mortality or an increase in serious illness, or which may pose a present or potential hazard to human health."²² Impacts from toxic air contaminants can occur during either the construction or operational phases of a project. Sources of TACs include industrial processes such as petroleum refining and chrome plating operations, along with certain commercial operations such as automotive repair shops, dry cleaners, gasoline stations and dry cleaners. Cars and trucks release at least forty different toxic air contaminants; the most important of these toxic air contaminants, in terms of health risk, include diesel particulates, benzene, formaldehyde, 1,3-butadiene, and acetaldehyde from fuel products. Public exposure to toxic air contaminants can result from emissions from normal operations as well as from accidental releases. Health effects of toxic air contaminants include cancer, birth defects, neurological damage, and death.

The majority of the estimated health risks from toxic air contaminants can be attributed to relatively few compounds, the most important of which is diesel particulate matter (DPM). DPM is a subset of PM2.5 because the size of diesel particles are typically 2.5 microns and smaller. The visible emissions in diesel exhaust are known as particulate matter or PM, which includes carbon particles or "soot". Exposure to diesel particulate matter is a health hazard, particularly to children whose lungs are still developing and the elderly who may have other serious health problems. Overall, diesel engine emissions are responsible for the majority of California's potential airborne cancer risk from combustion sources.

Asbestos is also listed as a TAC by the ARB and as a Hazardous Air Pollutant by the EPA. Asbestos occurs naturally in mineral formations and from crushing or breaking rocks containing these minerals through construction or other means, and releasing asbestos fibers into the air. Asbestos emissions can result from the sale or use of asbestos-containing materials (ACMs), road surfacing with such materials, grading activities, and surface mining. When inhaled, asbestos fibers may remain in the lungs and with time may be linked to such diseases as asbestosis, lung cancer, and mesothelioma. Naturally occurring asbestos is not present in San Bernardino County. Manmade sources of ACMs may be encountered during the demolition of older buildings

that may contain these materials (ACMs were often used in insulation, floor tiles, and other building products). No older buildings are located on the project site.

Projects in the South Coast Air Basin (SCAB) generating construction-related emissions that exceed any of the following emissions thresholds are considered to be significant under CEQA:

- 75 pounds per day of reactive organic compounds;
- 100 pounds per day of nitrogen dioxide;
- 550 pounds per day of carbon monoxide;
- 150 pounds per day of PM₁₀;
- 55 pounds per day of PM_{2.5}; or,
- 150 pounds per day of sulfur oxides.

A project would have a significant effect on air quality if any of the following operational emissions thresholds for criteria pollutants are exceeded:

- 55 pounds per day of reactive organic compounds;
- 55 pounds per day of nitrogen dioxide;
- 550 pounds per day of carbon monoxide;
- 150 pounds per day of PM₁₀;
- 55 pounds per day of PM_{2.5}; or,
- 150 pounds per day of sulfur oxides.

3.2 ENVIRONMENTAL ANALYSIS

A. Would the project conflict with or obstruct implementation of the applicable air quality plan? • Less than Significant Impact.

The project site is located within the South Coast Air Basin (SCAB), which covers a 6,600 square-mile area within Los Angeles, the non-desert portions of Los Angeles County, Riverside County, and San Bernardino County.⁴ Measures to improve regional air quality are outlined in the SCAQMD's Air Quality Management Plan (AQMP).⁵ The most recent AQMP was adopted in 2017 and was jointly prepared with the California Air Resources Board (CARB) and the Southern California Association of Governments (SCAG).⁶ The AQMP will help the SCAQMD maintain focus on the air quality impacts of major projects associated with goods movement, land use, energy efficiency, and other key areas of growth. Key elements of the 2016 AQMP include enhancements to existing programs to meet the 24-hour PM_{2.5} Federal health standard and a proposed plan of action to reduce ground-level ozone. The primary criteria pollutants that remain in the local area include PM_{2.5} and ozone.

Specific criteria for determining a project's conformity with the AQMP is defined in Section 12.3 of the SCAQMD's CEQA Air Quality Handbook. The Air Quality Handbook refers to the following criteria as a means to determine a project's conformity with the AQMP. *Consistency Criteria 1* refers to a proposed project's potential for resulting in an increase in the frequency or severity of an existing air quality violation, or its

⁴ South Coast Air Quality Management District, Final 2016 Air Quality Plan. Adopted March 2017.

⁵ Ibid.

⁶ Ibid.

potential for contributing to the continuation of an existing air quality violation. *Consistency Criteria 2* refers to a proposed project's potential for exceeding the assumptions included in the AQMP or other regional growth projections relevant to the AQMP's implementation.⁷

In terms of Criteria 1, the proposed project's long-term (operational) airborne emissions will be below levels that the SCAQMD considers to be a significant impact (refer to the analysis included in the next section where the long-term stationary and mobile emissions for the proposed project are summarized in Table 2). In addition, the project's operational emissions will be well within the emissions projections identified in the most recent AQMP. As shown in Table 3-5 of the Final 2016 AQMP, the future 2031 daily operational emissions with the estimated population, employment, and VMT growth projections are estimated to be: 345 tons per day of VOCs; 214 tons per day of NOx; 1,188 tons per day of CO; 18 tons per day of SOx; and 65 tons per day of PM_{2.5}. The project's operational emissions will be well within the emissions projections estimated in the AQMP. The proposed project is consistent with the San Bernardino County General Plan and will not violate Consistency Criteria 2. Since the proposed project will not be in violation of either Consistency Criteria, the project's potential impacts are considered to be less than significant.

B. Would the project result in a cumulatively considerable net increase of any criteria pollutant for which the project region is non-attainment under an applicable federal or state ambient air quality standard?
Less than Significant Impact.

The analysis of daily construction emissions has been prepared utilizing the California Emissions Estimator Model (CalEEMod V.2016.3.2) developed for the SCAQMD. The project's construction would include site preparation, construction, and the finishing of the project (paving, painting, and the planting of landscaping). The construction phase for the proposed project would take approximately nine (9) months to complete. The key construction phases are outlined below:

- Site Preparation. The project site would be readied for the construction during this phase. This phase
 would take approximately one month to complete and will involve the finished grading and trenching
 for footings and substructures. This phase will take one month to complete.
- *Construction*. The proposed new buildings would be constructed during this phase. This phase would take approximately six months to complete.
- *Paving*. This phase would involve the paving of the site. This phase would take approximately one month to complete.
- *Architectural Coatings and Finishing*. This phase will involve the painting of the buildings exteriors and the installation of landscaping. This phase will take approximately one month to complete.

As shown in Table 1, daily construction emissions will not exceed the SCAQMD significance thresholds. Therefore, the mass daily construction-related impacts associated with the proposed project would be less than significant.

-

⁷ South Coast Air Quality Management District. CEQA Air Quality Handbook. April 1993.

Table 1 Estimated Daily Construction Emissions

Construction Phase	ROG	NO ₂	co	SO ₂	PM ₁₀	PM _{2.5}
Site Preparation (on-site)	1.54	18.28	10.75	0.02	0.87	0.66
Site Preparation (off-site)	0.03	0.02	0.30		0.09	0.02
Total Site Preparation	1.57	18.30	11.05	0.02	0.96	0.68
Grading (on-site)	1.83	20.21	9.76	0.02	3.48	2.14
Grading (off-site)	0.04	0.03	0.38		0.11	0.03
Total Grading	1.87	20.24	10.14	0.02	1.41	2.17
Building Construction (on-site)	2.05	16.02	14.56	0.03	0.81	0.78
Building Construction (off-site)	0.18	1.70	1.59			0.13
Total Building Construction	2.23	17.72	16.15	0.03	0.81	0.91
Paving (on-site)	1.06	10.64	11.78	0.01	0.58	0.54
Paving (off-site)	0.06	0.04	0.57		0.17	0.05
Total Paving	1.12	10.68	12.35	0.01	0.75	0.59
Architectural Coatings (on-site)	39.21	1.52	1.82		0.09	0.09
Architectural Coatings (off-site)	0.02	0.01	0.22		0.07	0.02
Total Architectural Coatings	39.23	1.53	2.04		0.16	0.11
Maximum Daily Emissions	39.23	20.24	16.15	0.03	3.48	2.17
Daily Thresholds	75	100	550	150	150	55

Source: California Air Resources Board CalEEMod [computer program].

The project's construction would be required to adhere to all SCAQMD regulations related to fugitive dust generation and other construction-related emissions. Long-term emissions refer to those air quality impacts that will occur once the proposed project has been constructed and is operational and will continue over the operational life of the project. The long-term air quality impacts associated with the proposed project include mobile emissions associated with vehicular traffic. The analysis of long-term operational impacts also used the Caleemod computer model. As indicated in Table 2, the projected long-term emissions will also be below thresholds considered to be a significant impact.

Table 2
Estimated Operational Emissions in lbs/day

Listillate	Estimated Operational Emissions in 195/ day						
Emission Source	ROG	NO ₂	co	SO ₂	PM ₁₀	PM _{2.5}	
Area-wide (lbs/day)	2.25			0.00	0.00	0.00	
Energy (lbs/day)	0.09	0.88	0.74		0.07	0.07	
Mobile (lbs/day)	1.54	0.33	0.62	0.03	1.87	0.52	
Total (lbs/day)	3.88	1.21	1.36	0.03	1.94	0.59	
Daily Thresholds	55	55	550	150	150	55	
Significant Impact?	No	No	No	No	No	No	

As indicated in Table 2, the proposed project would result in potential operational emissions well below the SCAQMD's thresholds established by the SCAQMD. As a result, the potential impacts are considered to be less than significant.

C. Would the project expose sensitive receptors to substantial pollutant concentrations? • Less than Significant Impact.

Sensitive receptors refer to land uses and/or activities that are especially sensitive to poor air quality and typically include homes, schools, playgrounds, hospitals, convalescent homes, and other facilities where children or the elderly may congregate.⁸ These population groups are generally more sensitive to poor air quality. The nearest sensitive receptors to the project site include residential uses are located southeast and east of the site and the Crestview Elementary School is located approximately 600 feet to the east of the site. The SCAQMD requires that CEQA air quality analyses indicate whether a proposed project will result in an exceedance of *localized significance thresholds* or LSTs. LSTs apply to short-term (construction) emissions at a fixed location, and do not include off-site or regional emissions. The approach used in the analysis of the proposed project utilized a number of screening tables that identified maximum allowable emissions (in pounds per day) at a specified distance to any receptor.

The pollutants that are the focus of the LST analysis include the conversion of NO_x to NO_2 ; carbon monoxide (CO) emissions from construction; PM_{10} emissions from construction; and $PM_{2.5}$ emissions from construction. The use of the "look-up tables" is typically used for projects proposed on less than five acres of land area. The project site consists of 2.32 acres. Therefore, for the purposes of the LST analysis, the thresholds of significance for five acre sites were used. The average distance to the nearest sensitive receptors was assumed to be 100 meters (approximately 300 feet). The project site is located in Source Receptor Area (SRA)#33 (Southwest San Bernardino County). The proposed project's LST emissions are shown in Table 3. As indicated in Table 3, the emissions generated by the construction of the proposed project will not exceed the LSTs identified in Table 3.

Table 3 Local Significance Thresholds Exceedance SRA 33 for 5 Acre Site

Emissions	Proposed	Туре	Allowable Emissions Threshold (lbs/day) and a Specified Distance from Receptor (in meters)				
	Project	• • • • • • • • • • • • • • • • • • • •	25	50	100	200	500
NO_x	20.24	Construction	270	303	378	486	778
CO	16.15	Construction	2,193	2,978	5,188	9,611	29,410
PM_{10}	3.48*	Construction	4	12	20	34	78
PM _{2.5}	2.18*	Construction	2	3	5	11	41

Source: CalEEMod Version 2016.3.2.

An analysis of mobile source diesel particulate matter (DPM) emissions was performed for idling trucks, trucks travelling to the project site, and for the operation of construction equipment due to the presence of sensitive receptors located immediately east and south of the project site. The 2017 EMFAC emissions factors for LHD2 vehicles, or Light-Heavy-Duty trucks weighing no more than 14,000 pounds, were utilized in order to perform the analysis for construction trucks. Meanwhile, the emission factors for the individual construction equipment were derived from the SCAQMD. Construction vehicles will enter the project site from either Jurupa Avenue or Cedar Avenue. The model assumed construction vehicles would travel to the

-

^{*=} Note: These figures take into account the water of the site up to three times per day, which is a standard condition required by the SCAQMD.

⁸ South Coast Air Quality Management District. CEQA Air Quality Handbook, Appendix 9. As amended 2017.

site using Cedar Avenue at a speed of 45 miles per hour. According to the CalEEMod, there will be no more than 64 workers and vendors on-site at a time. Assuming five workers per truck, there will be the potential for up to 40 trucks carrying passengers. Table 4 shown below depicts the estimated mobile source emissions during construction from the contractor's vehicles. As shown in the table, the project's construction vehicles will result in negligible emissions.

Table 4
Mobile Source Emissions from Construction Vehicles

Pollutants	Emissions Factors (grams/mile)	Distance in miles (round trip)	Number of Vehicles	Emissions
PM10 Exhaust at Idle (grams/vehicle/day)	0.27616843		64	17.67 grams per day, or 0.03 pounds per day
PM10 Exhaust at 45 mph (grams/mile)	0.001928096	1.30	64	0.16 grams per day, or 0.0003 pounds per day
PM2.5 Exhaust at Idle (grams/vehicle/day)	0.02642215		64	1.69 grams per day, or 0.003 pounds per day
PM2.5 Exhaust at 45 mph (grams/mile)	0.001844688	1.30	64	0.15 grams per day, or 0.0003 pounds per day

Source: 2017 EMFAC Factors

Table 5 depicts the project's mobile source DPM emissions during the site preparation phase. The number and pieces of equipment that will be used during the site preparation phase was taken from the CalEEMod worksheets that were prepared for this project. As shown in the table, the project's site preparation phase will result in negligible emissions.

Table 5
Mobile Source Emissions During Site Preparation

	0 1					
Equipment	Number of Vehicles	Pollutants	Emissions Factors (grams/hour)	Number of Hours	Distance in miles	Emissions
Tractors	1	PM Exhaust during Operations (pounds/hour)	0.016	8		0.128 pounds per day
Loaders	2	PM Exhaust during Operations (pounds/hour)	0.016	8		0.256 pounds per day
Backhoes	2	PM Exhaust during Operations (pounds/hour)	0.016	8		0.256 pounds per day
Rubber Tired Dozers	3	PM Exhaust during Operations (pounds/hour)	0.0559	8		1.39 pounds per day

Table 6 depicts the project's mobile source DPM emissions during the construction phase. The number and pieces of equipment that will be used during the construction phase was taken from the CalEEMod worksheets that were prepared for this project. As shown in the table, the construction phase will result in negligible emissions.

Table 6
Mobile Source Emissions During Construction

Equipment	Number of Vehicles	Pollutants	Emissions Factors (grams/hour)	Number of Hours	Distance in miles	Emissions
Crane	1	PM Exhaust during Operations (pounds/hour)	0.0190	8		0.152 pounds per day
Forklift	3	PM Exhaust during Operations (pounds/hour)	0.008	8		0.064 pounds per day
Tractors	1	PM Exhaust during Operations (pounds/hour)	0.016	8	1	0.128 pounds per day
Loaders	1	PM Exhaust during Operations (pounds/hour)	0.016	8		0.128 pounds per day
Backhoes	1	PM Exhaust during Operations (pounds/hour)	0.016	8		0.128 pounds per day

Source: 2017 EMFAC Factors

Table 7 depicts the project's mobile source DPM emissions during the paving phase. The number and pieces of equipment that will be used during the paving phase was taken from the CalEEMod worksheets that were prepared for this project. As shown in the table, the grading phase will result in negligible emissions.

Table 7
Mobile Source Emissions During Paving

Equipment	Number of Vehicles	Pollutants	Emissions Factors (grams/hour)	Number of Hours	Distance in miles	Emissions
Pavers	2	PM Exhaust during Operations (pounds/hour)	0.046	8		0.736 pounds per day
Rollers	2	PM Exhaust during Operations (pounds/hour)	0.014	8		0.224 pounds per day
Paving Equipment	2	PM Exhaust during Operations (pounds/hour)	0.036	8		0.576 pounds per day

Source: 2017 EMFAC Factors

Most vehicles generate carbon monoxide (CO) as part of the tail-pipe emissions and high concentrations of CO along busy roadways and congested intersections are a concern. The areas surrounding the most congested intersections are often found to contain high levels of CO that exceed applicable standards and are referred to as *hot-spots*. Three variables influence the creation of a CO hot-spot: traffic volumes, traffic congestion, and the background CO concentrations for the source receptor area. Typically, a CO hot-spot may occur near a street intersection that is experiencing severe congestion (a LOS E or LOS F) where idling

vehicles result in ground level concentrations of carbon monoxide. However, within the last decade, decreasing background levels of pollutant concentrations and more effective vehicle emission controls have significantly reduced the potential for the creation of hot-spots. The SCAQMD stated in its CEQA Handbook that a CO hot-spot would not likely develop at an intersection operating at LOS C or better. Since the Handbook was written, there have been new CO emissions controls added to vehicles and reformulated fuels are now sold in the SCAB. These new automobile emissions controls, along with the reformulated fuels, have resulted in a lowering of both ambient CO concentrations and vehicle emissions. As a result, the potential impacts are considered to be less than significant.

D. Would the project result in other emissions (such as those leading to odors adversely affecting a substantial number of people? • Less than Significant Impact.

The SCAQMD has identified land uses that are typically associated with odor complaints. These uses include activities involving livestock, rendering facilities, food processing plants, chemical plants, composting activities, refineries, landfills, and businesses involved in fiberglass molding.⁹ Given the nature of the proposed use, no impacts related to odors are anticipated with the proposed project. In addition, the project site is not located in the vicinity of any odor generating use.

The emissions from the equipment that will be used on-site during the construction phase will be minor. Idling from construction vehicles and equipment will be restricted to five minutes or less based on standard SCAQMD protocols. Therefore, odors generated by diesel powered equipment will be less than significant. As a result, the potential impacts are anticipated to be less than significant.

3.3 RECOMMENDED MITIGATION

As indicated previously, the proposed project will not result in any significant construction and operational air quality impacts and no mitigation measures are required.

4. GREENHOUSE GAS EMISSIONS ANALYSIS

4.1 THRESHOLDS OF SIGNIFICANCE

According to Appendix G of the CEQA Guidelines, a project may be deemed to have a significant environmental impact on air quality, if it results in any of the following:

- The generation of greenhouse gas emissions, either directly or indirectly, that may have a significant impact on the environment; and,
- The potential for conflict with an applicable plan, policy, or regulation adopted for the purpose of reducing emissions of greenhouse gases.

⁹ South Coast Air Quality Management District. CEQA Air Quality Handbook, As amended 2017.

4.2 ENVIRONMENTAL ANALYSIS

A. Would the project generate greenhouse gas emissions, either directly or indirectly, that may have a significant impact on the environment? W Less Than Significant Impact.

The State of California requires CEQA documents to include an evaluation of greenhouse gas (GHG) emissions, or gases that trap heat in the atmosphere. GHG are emitted by both natural processes and human activities. Examples of GHG that are produced both by natural and industrial processes include carbon dioxide (CO_2), methane (CH_4), Nitrous Oxide (N_2O), and Chlorofluorocarbons (CFC):

- Carbon Dioxide (CO2): Carbon dioxide enters the atmosphere through the combustion of fossil fuels such as coal, natural gas, and oil, solid waste, trees and organic biological materials, and also as a result of certain chemical reactions (e.g., manufacture of cement). Carbon dioxide is removed from the atmosphere (or "sequestered") when it is absorbed by plants as part of the biological carbon cycle.
- Methane (CH₄): Methane is emitted during the production and transport of coal, natural gas, and oil.
 Locally, methane emissions also result from livestock and other agricultural practices and by the decay of organic waste in municipal solid waste landfills.
- Nitrous Oxide (N_2O): Nitrous oxide is emitted during agricultural and industrial activities, the combustion of fossil fuels and solid waste, as well as during treatment of wastewater.
- Fluorinated carbons and gasses: Hydrofluorocarbons, perfluorocarbons, sulfur hexafluoride, and
 nitrogen trifluoride are synthetic, powerful greenhouse gases that are emitted from a variety of
 industrial processes. Fluorinated gases are sometimes used as substitutes for stratospheric ozonedepleting gasses.

The accumulation of GHG in the atmosphere regulates the earth's temperature. Without these natural GHG, the Earth's surface would be about 61°F cooler.¹¹O However, emissions from fossil fuel combustion have elevated the concentrations of GHG in the atmosphere to above natural levels.

The SCAQMD has established multiple draft thresholds of significance. These thresholds include 1,400 metric tons of CO₂E (MTCO₂E) per year for commercial projects, 3,500 MTCO₂E per year for residential projects, 3,000 MTCO₂E per year for mixed-use projects, and 7,000 MTCO₂E per year for industrial projects. The SCAQMD currently has an established threshold of 10,000 MTCO₂E per year for industrial development (according to the SCAQMD, this threshold may be used for all type of development if the lead agency does not have a threshold identified).¹¹ The 3,500 MTCO₂E per year threshold was used in an effort to be conservative.

Table 9 summarizes annual greenhouse gas (CO₂E) emissions from the proposed project. Carbon dioxide equivalent, or CO₂E, is a term that is used for describing different greenhouses gases in a common and collective unit. As indicated in Table 8, the CO₂E total operational GHG emissions for the project are 3,965 MTCO₂E per year. This figure would actually be reduced by 50% to 3,118 MTCO₂E when accounting for shared trips and pass-by traffic. The total construction emissions would be 3,106 MTCO₂E per year. When amortized over a 30-year period, these emissions decrease to 103 MTCO₂E per year. These amortized construction

-

¹⁰ California, State of. OPR Technical Advisory – CEQA and Climate Change: Addressing Climate Change through the California Environmental Quality Act (CEQA) Review. June 19, 2008.

¹¹ Phone Call with Ms. Lijin Sun of the SCAQMD.

emissions were added to the project's operational emissions to calculate the project's true GHG emissions. As shown in the table, the project's total operational emissions would be 2,086 MTCO₂E per year, which is still below the thresholds identified for residential land uses.

Table 8 Greenhouse Gas Emissions Inventory

	GHG Emissions (tons/year)					
Source	CO ₂	CH ₄	N ₂ O	CO ₂ E		
Long-Term – Area Emissions	-					
Long-Term - Energy Emissions	1,068.31	0.02	0.02	1,064.60		
Long-Term - Mobile Emissions	2,896.72	0.19	0.00	2,901.45		
Long-Term – Waste Emissions						
Long-Term – Water Emissions						
Long-Term - Total Emissions	3,965.03	0.21	0.02	3,966.05		
Actual Emissions w/Passby & Shared Trips	1,982.52	0.11	0.01	1,983.03		
Total Construction Emissions	3,106.45	0.77		3,118.64		
Construction Emissions Amortized Over 30 Years				103 MTCO ₂ E		
Total Operational Emissions with Amortized Construction Emissions				2,086 MTCO ₂ E		
Significance Threshold				3,500 MTCO ₂ E		

The GHG emissions estimates reflect what a residential development of the same location and description would generate once fully operational. The type of activities that may be undertaken once the project is operational have been predicted and accounted for in the model for the selected land use type. It is important to note that the project is an "infill" development, which is seen as an important strategy in combating the release of GHG emissions. Infill development provides a regional benefit in terms of a reduction in Vehicle Miles Traveled (VMT) since the project is consistent with the regional and State sustainable growth objectives identified in the State's Strategic Growth Council (SGC).¹²

Infill development reduces VMT by recycling existing undeveloped or underutilized properties located in established urban areas. When development is located in a more rural setting, such as further east in the inland empire or desert areas, employees, patrons, visitors, and residents may have to travel farther since rural development is often located a significant distance from employment, entertainment, and population centers. Consequently, this distance is reduced when development is located in urban areas since employment, entertainment, and population centers tend to be set in more established communities. As a result, the potential impacts are considered to be less than significant.

_

¹² California Strategic Growth Council. http://www.sgc.ca.gov/Initiatives/infill-development.html. Promoting and enabling sustainable infill development is a principal objective of the SGC because of its consistency with the State Planning Priorities and because infill furthers many of the goals of all of the Council's member agencies.

B. Would the project conflict with an applicable plan, policy, or regulation adopted for the purpose of reducing emissions of greenhouse gases? • Less than Significant Impact.

AB-32 requires the reduction of GHG emissions to 1990 levels, which would require a minimum 28% in "business as usual" GHG emissions for the entire State. Additionally, Governor Edmund G. Brown signed into law Executive Order (E.O.) B-30-15 on April 29, 2015, the Country's most ambitious policy for reducing Greenhouse Gas Emissions. Executive Order B-30-15 calls for a 40% reduction in greenhouse gas emissions below 1990 levels by 2030.¹³ The proposed project will not involve or require any variance from an adopted plan, policy, or regulation governing GHG emissions. The emissions generated by the proposed project will be less than the thresholds of significance established for CO₂ (refer to Table 9).

The proposed project will be in compliance with the City's Building Code requirements and with Part 6 and Part 11 of Title 24 of the California Code of Regulations. On January 12, 2010, the State Building Standards Commission adopted updates to the California Green Building Standards Code (Code) which became effective on January 1, 2011. The California Code of Regulations (CCR) Title 24, Part 11: California Green Building Standards (Title 24) became effective to aid efforts to reduce GHG emissions associated with energy consumption. Title 24 now require that new buildings reduce water consumption, employ building commissioning to increase building system efficiencies, divert construction waste from landfills, and install low pollutant-emitting finish materials. The 2016 version of the standards became effective as of January 1, 2017. The 2016 version addresses additional items such as clean air vehicles, increased requirements for electric vehicles charging infrastructure, organic waste, and water efficiency and conservation. The California Green Building Standards Code does not prevent a local jurisdiction from adopting a more stringent code as State law provides methods for local enhancements. Since the project will be in conformance with Part 6 and Part 11 regulations, the potential impacts are considered to be less than significant.

4.3 MITIGATION MEASURES

As indicated previously, the proposed project will not result in any significant impacts with regards to the emission of GHG and no mitigation is required.

5. SUMMARY AND CONCLUSIONS

The following conclusions may be made based on the results of this air quality and greenhouse gas study.

- Construction emissions will be below the thresholds of significance for the six identified criteria pollutants.
- Adherence to SCAQMD Rule 403 will ensure fugitive dust emissions remain at levels that are less than significant.
- Operational emissions are projected to be below the thresholds of significance for the six identified criteria pollutants.

PAGE 20

¹³ Office of Governor Edmund G. Brown Jr. New California Goal Aims to Reduce Emissions 40 Percent Below 1990 Levels by 2030. http://gov.ca.gov/news.php?id=18938.

- The project's construction emissions will not exceed the Local Significance Thresholds (LST) for the four criteria pollutants. In addition, adherence to SCAQMD Rule 403 will further minimize fugitive dust emissions.
- The analysis of the mobile sourced diesel particulate matter emissions generated by construction vehicles and equipment will not be significant enough to result in a cancer risk of 10 in 1 million.
- The project's annual greenhouse gas emissions will be below the SCAQMD thresholds of significance for mixed use projects.
- Recommendations were made to reduce construction noise.
- Adherence to the most recent Title 24 requirements will reduce the exposure of future residents to excessive noise levels.
- The project will not generate operational noise that would impact the mobile home park to the west.

CONVENIENCE STORE, RETAIL	GASOLINE SALES, & DRIVE THROUGH FAST-FOOD RESTAURANT • AIR QUALITY & GREENHOUSE GAS STUI 11279 CEDAR AVENUE • BLOOMINGTON, SAN BERNARDINO COUNTY	ŊΥ
	This page has been intentionally left blank.	

2022 3

CalEEMod Version: CalEEMod.2016.3.2

Page 1 of 23

Date: 5/20/2020 12:51 PM

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

South Coast AQMD Air District, Summer Bloomington Air Quality Study

1.0 Project Characteristics

1.1 Land Usage

Population	0	
Floor Surface Area	101,059.00	
Lot Acreage	2.32	
Metric	dwnd	
Size	8.00	
Land Uses	Gasoline/Service Station	

1.2 Other Project Characteristics

Precipitation Freq (Days) Operational Year N2O Intensity (Ib/MWhr) 0 22 Mind Speed (m/s) Urban Utility Company CO2 Intensity (Ib/MWhr) Urbanization Climate Zone

1.3 User Entered Comments & Non-Default Data

Project Characteristics

Land Use - N/A

Construction Phase - N/A

Construction Off-road Equipment Mitigation -

Area Mitigation -

Energy Mitigation -

Water Mitigation -

CalEEMod Version: CalEEMod.2016.3.2

Page 2 of 23

Date: 5/20/2020 12:51 PM

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

Table Name	Column Name	Default Value	New Value
tblAreaMitigation	UseLowVO CPaintParking Check	False	True
tblConstructionPhase	NumDays	10.00	24.00
tbiConstructionPhase	NumDays	220.00	131.00
tblConstructionPhase	NumDays	6.00	12.00
tblConstructionPhase	NumDays	10.00	23.00
tbiConstructionPhase	NumDays	3.00	11.00
tblConstructionPhase	PhaseEndDate	12/15/2021	10/10/2021
tblConstructionPhase	PhaseEndDate	11/17/2021	8/4/2021
tblConstructionPhase	PhaseEndDate	1/13/2021	2/2/2021
tblConstructionPhase	PhaseEndDate	12/1/2021	9/6/2021
tblConstructionPhase	PhaseEndDate	1/5/2021	1/15/2021
tblConstructionPhase	PhaseStartDate	12/2/2021	9/7/2021
tblConstructionPhase	Ph aseStartDate	1/14/2021	2/3/2021
tblConstructionPhase	PhaseStartDate	1/6/2021	1/16/2021
tblConstructionPhase	PhaseStartDate	11/18/2021	8/5/2021
tblGrading	AcresOfGrading	6.00	3.00
tblGrading	AcresOfGrading	16.50	4.50
tblLandUse	LandUseSquareFeet	1,129.40	101,059.00
tblLandUse	LotAcreage	0.03	2.32

2.0 Emissions Summary

CalEEMod Version: CalEEMod.2016.3.2

Page 3 of 23

Date: 5/20/2020 12:51 PM

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

3,118.646	000000	0.7698	3,106.450	0.0000 3,106.450 3,106.450 0.7698	00000	42117	0.8433	3,3685 0,8433	7.3156	0.9166	0682"9	628 0'0	16.1532	20.2409	39.2785	mn .
3,118.646 6	0.0000	0.7698	3,108.450	0.0000 3,106.450 3,106.450 0.7898	0.0000	42117	3.3685 0.8433	3.3685	7.3156	0.9166	6.3990	62800	16.1532	20.2409	392785	-
		ay	lblday							lb/day	All					r
e200	NZO	CH4	Total CO2	Bio-CO2 NBio-CO2 Total CO2	Bio-CO2	PM2.5 Total	Exhaust PM2.5	Rugitive PM2.5	PM10 Total	Erhaust PM10	Fugitive PM10	802	8	NOX	ROG	

Mitigated Construction

C02e		3,118.648	0.0000 3,118.646
NZO		00000	0.0000
CH4	lay.	0.7898	0.7698
Total CO2	Ibday	3,106,450 3,106,450 0.7898	3,106.450
Bio- CO2 NBio- CO2 Total CO2		3,106,450	3,106,450 3,106,450 0.7698
Bio-CO2		0.0000	0.0000
PM2.5 Total		21750	21750
Exhaust PM2.5		0.8433	0.8433
Rugitive PM2.5		1.3318	1,3318
PM10 Total		3.4804	3,4804
Exhaust PM10	lb/day	0.9166	0.9166
Fugitive PM10	All	2.5638	2,5638
805		620:00	0.0329
8		16.1532	16.1532
NOX		20.2409	39.2785 20.2409 16.1532
ROG		392785	39.2785
	Year	2021	Maximum

CO2e	0.00
NZ0 C	00.00
CH4	000
0 200	000
CO2 Tota	
2 NBio-	0.00
Bio- CC	00'0
PM2.5 Total	48.36
Exhaust PM2.5	0.00
Fugitive PM2.5	60.46
PM10 Total	5243
Exhaust PM10	0.00
Fugitive PM10	59.93
802	00'0
8	000
NOX	0.00
ROG	00'0
	vercent eduction

CalEEMod Version: CalEEMod.2016.3.2

Page 4 of 23

Date: 5/20/2020 12:51 PM

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

2.2 Overall Operational Unmitigated Operational

8700		87006-	064.599	2,901.453	3,966.054
2			0.0194 1,	2	0.0194 3,
450	,	0.000.0	0.0203	0.1892	0.2095
IOS BIO	Ibday	1.75006-			3,955.035
1818-1022		1.7500e- 003	1,058.310 1,058.310	2,896,723 2,896,723 8 8	3,955.035
BIO-COZ 1880-COZ 1988-COZ					
Total		0.0000	0.0670	0.5181	0.5851
PM2.5		0.0000	0.0870	0.0219	6880.0
PM2.5				0.4962	7965
Total		00000	0.0670	1.8781	1.9451
PM10	lb/day	0.0000	0.0870	0.0235	0.0905
PM10	MI			1.8548	1.8546
305		0.0000	5.2900a- 003	0.0283	0.0336
8		9.2000	0.7408	9.6223	10.3640
XON.		1.00000-	0.8819	6.6322	7.5142
90		2.2577	0.0970	1.5417	3.8964
	Category	Ama	Energy	Mobile	Total

Mitigated Operational

9ZOO		1.8700e- 003	1,084,599	2,901.453	3,966.054
OZN			0.0194		0.0194
CH4	s),	0.000.0	0.0203	0.1892	0.2095
Total CO2	lb/day	1.7500e- 003	1,058.310	2,896.723	3,955.035 6
NBio-002 Total CO2		1.7500a- 003	1,058.310	2,896,723 2,896,723	3,955.035 3,955.035 6 6
Bio- CO2					
PM2.5 Total		0.0000	0.0670	0.5181	0.5851
Exhaust PM2.5		0.0000	0.0670	0.0219	0.0889
Rugitive PM2.5				0.4962	0.4962
PM10 Total		0.0000	0.0670	1.8781	1.9451
Exhaust PM10	day	0.0000	0.0870	0.0235	9060'0
Fugitive PM10	lb/day		 	1.8546	1.8546
802		00000	5.29008-	0.0283	0.0336
00		8.2000 6 004	0.7408	9.6223	10,3640
NON		1.0000 6 005	0.8819	6.6322	7,5142
POG		2.2577	0.0970	1.5417	3.8964
	Category	Area	Energy	Mobile	Total

CalEEMod Version: CalEEMod.2016.3.2

Page 5 of 23

Date: 5/20/2020 12:51 PM

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

CO2e	00'0
N20	00'0
7HO	000
Total CO2	00.00
NBio-CO2	00'0
Bio- CO2	00'0
PM2.6 Total	00.00
Exhaust PM2.5	00'0
Fugitive PM2.5	00'0
PM10 Total	00'0
Exhaust PM10	00'0
Fugitive PM10	00'0
802	00'0
8	0.00
×ON	00'0
ROG	0.00
	Percent Reduction

3.0 Construction Detail

Construction Phase

g 2 3 End Dat 10/10/2021 /15/202 2/2/2021 8/4/2021 9/6/2021 1/16/2021 2/3/2021 8/5/2021 9/7/2021 1/1/2021 vchitectural Coating uilding Constr Srading aving rchitectural Coating uilding Constr

Acres of Grading (Site Preparation Phase): 4.5

Acres of Grading (Grading Phase): 3

Acres of Paving: 0

Residential Indoor: 0; Residential Outdoor: 0; Non-Residential Indoor: 151,589; Non-Residential Outdoor: 50,530; Striped Parking Area: 0 (Architectural Coating – soft)

OffRoad Equipment

CalEEMod Version: CalEEMod.2016.3.2

Page 6 of 23

Date: 5/20/2020 12:51 PM

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Architectural Coating	Air Compressors	1	6.00	78	0.48
Paving	Cement and Mortar Mixers		8,00	o	0.56
Building Construction	Generator Sets	-	8.00	84	0.74
Grading	Graders	-	8,00	187	0.41
Building Construction	Cranes	-	8.00	231	0.29
Building Construction	Forklifts	2	7.00	88	0.20
Site Preparation	Graders	-	8,00	187	0.41
Paving	Pavers	-	8.00	130	0.42
Paving	Rollers	2	8,00	80	0.38
Paving	Paving Equipment	-	8.00	132	0.36
Grading	Rubber Tired Dozers	-	8.00	247	0.40
Building Construction	Tractors/Loaders/Backhoes	-	9009	16	0.37
Site Preparation	Scrapers	-	8.00	367	0.48
Grading	Tractors/Loaders/Backhoes	2	7.00	16	0.37
Paving	Tractors/Loaders/Backhoes	-	8.00	26	0.37
Site Preparation	Tractors/Loaders/Backhoes	1	7.00	26	0.37
Building Construction	Welders	3	8.00	46	0.45

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip H Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehide Class
Site Preparation	3	8.00	00'0		14.70	6.90		20.00 LD_Mix		ннот
Grading	4	10.00			14.70	6.90			HDT_Mix	ннрт
Building Construction	8	32.00	17.00		14.70	6.90				HHDT
Paving	9	15.00	00'0	0000	14.70	6.90		20.00 LD_Mix	HDT_Mix	ннот
Architectural Coating	-	9009	00'0	00'0	14.70	6.90		20.00 LD_Mix	HDT_Mix	HHDT

CalEEMod Version: CalEEMod.2016.3.2

Page 7 of 23

Date: 5/20/2020 12:51 PM

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

3.1 Mitigation Measures Construction

Water Exposed Area

3.2 Site Preparation - 2021 Unmitigated Construction On-Site

2,392.069		9292'0	2,372,883 2,372,883 0.7674 2	2,372,883		9269'0	0.6457	891000	1.1357	6102'0	8884.0	0.0245	10.7496	18.2862	1,5463	Total
2,392,069		0.7874	2,372,883 2,372,883 0,7674	2,372,883		0.6457	0.6457		0.7019	0.7019		0.0245	10.7498	18.2862	1.5483	- -
0.0000			0.0000			0.0468	0.0000	0.0468	0.4338	0.0000	0.4338					gitive Dust
		lay	Ibday							lb/day	IDV					
C02e	NZO	CH4	Total CO2	Bio- CO2 NBio- CO2 Total CO2	Bio- CO2	PM2.5 Total	Exhaust PM2.5	Fugitive PM2.5	PM10 Total	Exhaust PM10	Fugitive PM10	800	8	NOX	ROG	

CalEEMod Version: CalEEMod.2016.3.2

Page 8 of 23

23

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

3.2 Site Preparation - 2021

Unmitigated Construction Off-Site

		0.0000	0.0000	88.6518	88.6518
		00	8	88.6	88.6
	lbday	000000	0.0000	2.3900e- 003	2.3800e- 003
	IPK	000000	0.0000	88.5023 88.5923	88.5923
		0.0000	0.0000	88.5923	88.5923
Total		0.0000	0.0000	0.0243	0.0243
PM2.5		000000	0.0000	7 6.1000e- 004	6.1000e- 004
PM2.5		000000	0.0000	0.0237	0.0237
Total		00000	00000	0.0901	0.0901
PM10	tary	0.0000	0.0000	0.0854 6.6000e- 0.0901 004	6.60.00e- 004
PM10	lb/day	000000	0.0000	0.0894	0.0894
		00000	0.0000	8.9000e- 004	8.9000e- 004
		0.000	0.0000	0.3014	0.3014
		0.0000	0.0000 0.0000	0.0219	0.0219
		00000 00000	0.0000	0.0338	80000
	Category	Hauling	Vendor	Worker	Total

Mitigated Construction On-Site

2,392.069		0.7674	2,372,883	0.0000 2,372,883 2,372,883 0.7674	0.0000	0.6640	0.6457	0.0183	0.8711	0.7019	0.1692	0.0245	10.7496	18.2862	1.5463	Total
2,382.069		0.7874	2,372,883	2,372,883 2,372,883	'	0.6457	0.6457		0.7019	0.7019		0.0245	10.7496	18.2862	1.5483	Off-Road
000000			0.0000			0.0183	0.0000	0.0183	0.1692	0.0000	0.1692					uglave Dust
		ay	Ibklay							lb/day	Ŋ					Category
CO2e	NZO	CH4	Total CO2	NBio- CO2 Total CO2	Bio- CO2	PM2.5 Total	Exhaust PM2.5	Fugitive PM2.5	PM10 Total	Echaust PM10	Fugitive PM10	802	8	NOX	ROG	

CalEEMod Version: CalEEMod.2016.3.2

Page 9 of 23

Date: 5/20/2020 12:51 PM

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

3.2 Site Preparation - 2021

101	Off-Site
	o
5	ij
5	\$
Ļ	Suc
í	ŏ
3	Be
5	ga
5	Ĭ

3.3 Grading - 2021

Unmitigated Construction On-Site

	90a	NOX	8	802	Fugitive PM10	Edhaust PM10	PM10 Total	Rugitive PM2.5	Echaust PM2.5	PM2.5 Total	BIo- CO2	NBio-002 Total C02	Total CO2	CH4	NZO	0000
agary					lb/day	tay							lb/day	ay		
ive Dust					6.2872	0.000	62872	3.3389	0.000	3.3389			0.0000			00000
-Road	1.8271	20.2135	9.7604	0.0206		0.9158	0.9158		0.8425	0.8425		1,995,611	1,995.611 1,995.611	0.6454		2,011,747
Fotal	1.728.1	20.2135	9.7604	0.0206	6.2872	0.9158	7.2030	3,3389	0.8425	4.1813		1,995,611	1,995.611 1,995.611	0.6454		2,011.747

CalEEMod Version: CalEEMod.2016.3.2

Page 10 of 23

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

3.3 Grading - 2021 Unmitigated Construction Off-Site

		_			_
COZe		000000	0.0000	110.8148	110.8148
NZO					
CH4	ay	0.000.0	0.000	2.9800e- 003	2.9800e- 003
Total CO2	Ibday	0.0000 0.0000	0.000.0	110.7403	110.7403
NBio-002		0.0000	0.0000	110.7403 110.7403 2.9900e-	110.7403 110.7403
Bio- CO2 NBio- CO2 Total CO2					
PM2.5 Total		0.0000	0.0000	0.0304	0.0304
Exhaust PM2.5		0.0000	0.0000	7.60006-	7.6000e- 004
Rugitive PM2.5		0.0000 0.0000 0.0000	0.0000	0.0298	0.0296
PM10 Total		0.0000	0.0000	0.1126	0.1126
Exhaust PM10	lb/day	0.0000	0.0000 0.0000	0.1118 8.2000e- 0.1126 004	18 8.2000e- 004
Fugitive PM10	Ib/o			0.1118	÷
802		0.0000	0.0000	7 1.1100e-	1.1100e- 003
00		0.0000	0.0000	0.3767	0.3767
NOx		000000	0.0000	0.0274	0.0274
ROG		0.0000	0.0000	0.0422	0.0422
	Category	Hauling	Vendor	Worker	Total

Mitigated Construction On-Site

Š.		8	88	Fugitive E PM10 Ib/day	PM 10 PM 10 0.0000	1	Fuglive PM2.6	PM2.5 PM2.5 0.000		BIO- CO2	NBIO-002	NBIo- CO2 Total CO2 Ibday	CH4	SN N	00000
20.2135 9.7604	9.780	*	0.0208		0.9158	0.9158		0.8425	0.8425	0.0000	1,995,611	1,995,611 1,995,611	0.6454		2,011,747
20.2135 9.7604	9.7604		0.0 206	2.4520	0.9158	3.3678	1.3022	0.8425	21446	0.0000	1,995.611	1,995.611 1,995.611	0.6454		2,011.747

CalEEMod Version: CalEEMod.2016.3.2

Page 11 of 23

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

Mitigated Construction Off-Site 3.3 Grading - 2021

110.8148 00000 2.9800e-003 0000 29800e-003 110.7403 0000 110,7403 110.7403 00000 0000 0.0304 0.0304 7.60006-7.60006-0.00 PM2.5 0.000 0.0298 0.1126 00000 0.1126 8.2000 904 8.2000e-004 Exhaust PM 10 0.0000 0.000 PM10 0.1118 0.000 1100e 003 00000 1.1100e-003 0.000 0.3767 0.0000 0000 0.0274 0.0422 00000 Worker Total

3.4 Building Construction - 2021 Unmitigated Construction On-Site

COZe		2,300,193	2,300.193
NZO			
CH4	Ae.	0.4503	0.4503
Total CO2	lb/day	2,288.935 2,288.935 5 5	2,288.935 2,288.935 0.4503 5 5
BIO-CO2 NBIO-CO2 ToNS CO2		2,288.935	2,288.935
BIo- CO2			
PM2.5 Total		0.7831	0.7831
Exhaust PM2.5		0.7831	0.7831
Puglave PM2.6			
DIMIO Total		0.8173	0.8173
Edhaust PM10	lb/day	0.8173	0.8173
Fugitive PM10	All		
80S		0.0250	0.0250
00		14.5629	14.5629
XON		16.0275	16.0275
୭୦ଧ		2.0451	2.0451
	agory	Road	otal

CalEEMod Version: CalEEMod.2016.3.2

Page 12 of 23

Date: 5/20/2020 12:51 PM

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

3.4 Building Construction - 2021 Unmitigated Construction Off-Site

C02e		00000	463.8458	354.6073	818.4531
NZO					
CH4	lbday	000000	0.0280	900096 -900096	0.0376
Total CO2	yqi	00000 00000	463.1454 463.1454 0.0230	354,3891 354,3691 9,5300e-	817.5145 817.5145
NBio-002		00000	463.1454	354.3691	817.5145
Bo- CO2 NBo- CO2 Total CO2					
PM2.5 Total		00000	0.0345	0.0973	0.1317
Exhaust PM2.5		0.000.0	3.1200e- 003	2.4200e- 0. 003	6.5400e- 003
Rugitive PM2.5		00000 00000 00000	0.0313	0.0949	0.1262
PM10 Total		00000	0.1121	0.3603	0.4724
Exhaust PM10	lb/day	0.0000 0.0000	3.2700e- 003	77 2.6300e- 003	5.9000e- 003
Fugitive PM10	/GII	0.0000	4.3400e- 0.1088 3.2700e- 0.1121 0.0313 003	0.35	0.4665
802		00000	4.3400e- 003	3.56006-	3 7.9000e- 003
8		0.0000	0.3848	1.2055	1.590
ROG NOX		0.0000 0.0000 0.0000	0.0473 1.6214 0.3848	0.1351 0.0876 1.2055	1.7090
ROG		0.0000	0.0473	0.1351	0.1824
	Category	Hauling	Vendor	Worker	Total

Mitigated Construction On-Site

NZO COZe		2,300,193	2,300.193
CH4 N	ay	0.4503	0.4503
Total CO2	Ibday	0.0000 2.288,935 2.288,935 0.4503	2,288.935 2,288.935 5 5 5
Bio-CO2 NBio-CO2 Total CO2		2,288.935	
BIO- CO2		0.0000	0.0000
PM2.5 Total		0.7831	0.7831
Exhaust PM2.5		0.7831	0.7831
Rugitive PM2.5			
PM10 Total		0.8173	0.8173
Exhaust PM10	lb/day	0.8173	0.8173
Fugitive PM10	Ŋ		
802		0.0250	0.0250
8		14.5629	14.5629
NOX		16.0275	16.0275
ROG		2.0451	2.0451
	ategory	#-Road	Total

CalEEMod Version: CalEEMod.2016.3.2

Page 13 of 23

Date: 5/20/2020 12:51 PM

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

3.4 Building Construction - 2021

Mitigated Construction Off-Site

NZO COZB		00000	463.8458	354.6073	818.4531
NZV.					
Š	lay	000000	0.0280	9.5300e- 003	0.0376
108 002	Ibday	00000 00000	463.1454 463.1454	354,3691 354,3691 9,5300e-	817.5145 817.5145
Total		00000	463.1454	354.3691	817.5145
200-002					
Total		0.0000	0.0345	0.0973	0.1317
PM2.5		0.000.0	3.1200e- 003	2.4200e- 003	5.5400e- 003
PM2.5 PM2.5		00000 00000	0.0313	0.0949	0.1262
Total		0.0000	0.1121	0.3603	0.4724
PM10	lb/day	0.0000	3.2700e- 003	7 2.6300e- 003	\$000 -90006-9
PM10	/GII	0.0000	0.1088	0.357	9995'0
300		00000	4.3400e- 003	3.5600e- 003	7.9000e- 003
3		0.0000	0.3848	1.2055	1.5903
NOX		0.0000	1.6214 0.3848	0.0876	1.7090
2		0.0000	0.0473	0.1351	978170
	Category	Hauling	Vendor	Worker	Total

3.5 Paving - 2021

Unmitigated Construction On-Site

0ZO2		1,722,652	0.0000	1,722.652
NZO				
CH4	ay	0.5417		0.5417
Total CO2	Ibday	1,709.110	0.000.0	71,709,110 1,709,110 0,5417 T
Bio-CO2 NBio-CO2 Total CO2		1,709,110		1,709.110
BIO- CO2				
PM2.5 Total		0.5371	0.0000	0.5371
Echaust PM2.5		0.5371	0.0000	0.5371
Fugitive PM2.5				
PM10 Total		0.5826	0.0000	0.5826
Exhaust PM10	lb/day	0.5826	0.0000	0.5826
Fugitive PM10	/GII			
20S		0.0178		0.0178
00		11.7756		11.7756
NON		10.6478		10.6478
BOM		1.0633	0.0000	1.0633
	Category		Paving	Total

CalEEMod Version: CalEEMod.2016.3.2

Page 14 of 23

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

Unmitigated Construction Off-Site 3.5 Paving - 2021

COZe		000000	0.0000	166.2222	166, 222 2
NZO					
CH4	ay	000000	0.0000	4.4700e- 003	4.4700e- 003
Total CO2	lb/day	0.000.0	0.000.0	166.1105	166.1105
NBIo-002		0.0000	0.0000	166.1105 166.1105 4.47006-	166.1105
Bio- CO2 NBio- CO2 Total CO2					
PM2.5 Total		0.0000	0.0000	0.0456	0.0456
Echaust PM2.5		0.000.0	0.000.0	1.1400e- 003	1.1400e- (003
Rugitive PM2.5		0.000.0	0.0000	0.0445	0.0445
PM10 Total		00000	0.0000	0.1689	0.1689
Exhaust PM10	lb/day	0.0000	0.0000	1.2300e- 003	1_2300e- 003
Fuglive PM10	/GII	0.0000	0.0000	0.1677	7,1677
802		00000	0.0000	1.6700e- 003	1.6700e- 003
8		0.0000	0.0000	0.5651	0.5651
NOX		0.000.0 0.000.0 0.000.0	0.0000 0.0000	0.0411	0.0411
ROG		0.0000	0.0000	0.0633	0.0633
	Category	Hauling	Vendor	Worker	Total

Mitigated Construction On-Site

2 CH4 N2O C02e	IbVday	0.5477	00000	0 0.5417 1,722.652
NBID-002 Total C02	a	1,709,110 1,709,110	0.0000	1,709,110 1,709,110
PM2.5 Blo-CO2 Total		0.5371 0.0000	0.0000	0.5371 0.0000
Erhaust PM2.5		0.5371 0.	0.0000	0.5371 0.
PM10 Rugitive Total PM2.5		0.5826	0.0000	0.5826
tve Edhaust 10 PM10	lb/day	0.5826	0.0000	0.5826
SO2 Fugitive PM10		0.0178		0.0178
8		11.7756		11.7756
NOX		33 10.6478	8	33 10.6478
ROG	ategory	M-Road 1.0633	Paving 0.0000	Total 1.0633

CalEEMod Version: CalEEMod.2016.3.2

Page 15 of 23

Date: 5/20/2020 12:51 PM

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

3.5 Paving - 2021
Mitigated Construction Off-Site

	0000	0000	1 2222	166, 222 2
	0	ŏ	166	166
				A
day	0000	0.000		4.47006-
VQI	000000	0.0000	166.1105	166.1105
	0.0000	0.0000	166.1105	166.1105
	00000	00000	0.0456	0.0456
	000000	0.000.0	1.14006-	1.1400e- 003
	000000	0.000.0	0.0445	0.0445
	00000	00000	0.1689	0.1689
day	0.0000	0.0000	1.23006-	1.2300e- 0
ogi	000000	000000	0.167	0.1677
	00000	00000	1.6700a- 003	1.6700e- 003
	0.0000	0.0000	0.5651	0.565
	0.0000	0.0000	0.0411	0.0411
	000000	0.0000	0.0633	0.0633
Category	BujineH	Vendor	Worker	Total
	Calogory Ibiday	(a) 00:00:0 00:00:0 00:00:0 00:00:0 00:00:0	134day 154day 1	0.00000 0.000000

3.6 Architectural Coating - 2021 Unmitigated Construction On-Site

0.0193 281.4481 281.4481 0.0941 Exhaust PM 10 0.0941 Fugitive PM10 2.9700e-003 8 0.2189 Off-Road Fotal

281.9309

CalEEMod Version: CalEEMod.2016.3.2

Page 16 of 23

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

3.6 Architectural Coating - 2021 Unmitigated Construction Off-Site

6700		00000	0.0000	66,4889	66.4889
NZO					
CH4	lb/day	0.0000	0.000.0	1.7900e- 003	1.7900e- 003
I OUR COZ	IDK	000000	0.0000	66.4442	66.4442
NBIO-002		00000	0.0000	66.4442	66.4442
BIO-COZ NBIO-COZ 1018 COZ					
Total		00000	00000	0.0182	0.0182
PM2.5		000000	000000	4,5000e- 004	4.5000e-
PM2.5		000000	000000	0.0178	8210.0
Total		00000	0.0000	0.0676	9.790.0
PM10	lb/day	0.0000	0.0000	4.9000e- 0 004	71 4.9000e- 004
PM10	Ib/c	0.0000	0.0000	0.0871	90'0
305		00000	00000	6.7000e- 004	6.7000e- 004
3		0.0000	0.0000	0.2280	0.2260
NOX		000000	0.0000	0.0164	0.0164
200		0.0000	0.0000	0.0253	0.0253
	Category	бијпен	Vendor	Worker	Total

Mitigated Construction On-Site

C02e		00000	281.9309	281.9309
NZO				
CH4	ay		0.0193	0.0193
Total CO2	lb/day	0.0000	281.4481 281.4481 0.0183	281.4481
NBio-002 Total C02			281.4481	281,4481 281,4481
BIO- CO2			0.0000	0.0000
PM2.5 Total		00000	0.0941	0.0941
Echaust PM2.5		0.000.0	0.0941	0.0941
Fugitive PM2.5				
PM10 Total		0.0000	0.0941	0.0941
Exhaust PM10	lb/day	0.000	0.0941	0.0941
Fugitive PM10	IDV			
802			2,97006-	2.9700e- 003
8			1.8176	1.8176
NOX			1.5268	1.5268
DO9		39.0342	0.2189	39.2531
	Category	rchit. Coaling	Off-Road	Total

CalEEMod Version: CalEEMod.2016.3.2

Page 17 of 23

Date: 5/20/2020 12:51 PM

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

3.6 Architectural Coating - 2021 Mitigated Construction Off-Site

Φ.		8	8	68	6
0000		00000	0.0000	66.4889	66.4889
NZO					
CH4	lb/day	000000	00000	1.79006-	1.7900e- 003
Total CO2	yqi	000000	0.0000	66.4442	66.4442
Bio- CO2 NBio- CO2 Total CO2		000000	00000	66.4442	66.4442
BIO- CO2					
PM2.5 Total		00000	00000	0.0182	0.0182
Exhaust PM2.5		000000	0.0000	4.5000e- 004	4.5000e-
Rugitive PM2.5		0.0000	0.0000	0.0178	0.0178
PM10 Total		00000	00000	0.0676	9.790.0
Echaust PM10	lb/day	0.0000	0.0000	4.9000e- 004	4.9000e- 004
Fugitive PM10	/GII	000000	0.0000	0.0671	0.0671
802		000000	00000	6.70008-	6.7000e- 004
8		0.0000	0.0000	0.2280	0.2260
NOx		000000	0.0000	0.0164	0.0164
ROG		0.0000	0.0000	0.0253	0.0253
	Category	Hauling	!	Worker	Total

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

CalEEMod Version: CalEEMod.2016.3.2

Page 18 of 23

Date: 5/20/2020 12:51 PM

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

8700		2,901.453	2,901,453
SS			
C14	ay	0.1892	0.1892
Total COZ	lbday	2,896.723 8	2,896,723
Total Bio-COZ NBO-COZ 1088-COZ CH4		2,896,723 2,896,723 0.1892	2,896,723 2,896,723 0.1892 8 8
200 ea			
Total		0.5181	0.5181
PM2.5		0.0219	0.0219
PM2.5			1.8781 0.4962
Total		1.8781	1.8781
PM10 PM10	tay	1.8546 0.0235 1.8781 0.4962	0.0283 1.8546 0.0235
PM10	lb/day	1.8546	1.8546
302		0.0283	i
3		9.6223	9.6223
NOX		6.6322	6.6322
2		1.5417	1.5417
	Category	Mfgated 1.5417	Unmigated

4.2 Trip Summary Information

	Awen	Average Daily Trip Rate	ate	Unmitigated	Mitigated
Land Use	Weekday	Safurday	Sunday	TMV leunnA	Annual VMT
Gasoline/Service Station	1,348.48	1,348.48	1348.48	872,182	872,182
Total	1,348.48	1,348.48	1,348.48	872,182	872,182

4.3 Trip Type Information

		Miles			7rip %			Trip Purpose %	% 4
Land Use	W-D to WH	H-Sorc-C	H-0 or C-NW	H-W or C-W	HS or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Gasoline/Service Station	16.60	8.40	6.90	2.00	79.00	19.00	14	27	89

4.4 Fleet Mix

Land Use	MOL	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	SUBO	SNBN	MCY	SBUS	MH
Gasoline/Service Station	0.549559	0.042893	0.201564	0.118533	0.015569	0.005846	0.021394	0.034255	0.002099	0.001828	0.004855	0.0000709	96800000
	1	1	1	1	1	1	1	1	1	1	1	1	1

5.0 Energy Detail

Historical Energy Use: N

CalEEMod Version: CalEEMod.2016.3.2

Page 19 of 23

Date: 5/20/2020 12:51 PM

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

5.1 Mitigation Measures Energy

Install High Efficiency Lighting

COZe		0.0194 1,084.599	0.0194 1,084.599					
N2O		0.0194	0.0194					
CH4	ay		1,058.310 0.0203					
Total CO2	lb/day	1,058.310 1,088.310 0.0203	1,058.310					
Bio- CO2 NBio- CO2 Total CO2		1,058.310	1,058,310					
Bio- CO2								
PM2.5 Total	0.0670							
Edhaust PM2.5		0.0870	0.0670					
Fugitive PM2.5								
PM10 Total		2	~					
Edhaust PM10	lb/day	0.0870	0.0870					
Fugitive PM10	/GII							
802		5.2900e- 003	5.2900e- 003					
co								
NOX		0.8819 0.7408	0.8819					
ROG		0.0970	0.0970					
	Category	NaturalGas Mfgated						

5.2 Energy by Land Use - NaturalGas

Unmitigated

8700		0.0194 1,064,599	1,064.599
NZO		0.0194	0.0194
CH4	ay	0.0203	0.0203
Total CO2	lb/day	1,058.310	068.310
NBIO- CO2 Total CO2		1,058.310	1,058.310 1
BIO- C02			
PM2.5 Total		0.0670	0.0670
Exhaust PM2.5		0.0870	0/90'0
Fugitive PM2.5			
PM10 Total		0.090.0	0.0670
Exhaust PM10	lb/day	0.0870	0.780.0
Puglive PM10	/GI		
205		5.29008-	5.2900e- 003
8		0.7408	0.7408
NOX		0.8819	0.8819
ROG		0.60.0	0.0870
NaturalGa s Use	kBTU/yr	8995.64	
	Land Use	Station 8995.64	Total

CalEEMod Version: CalEEMod.2016.3.2

Page 20 of 23

Date: 5/20/2020 12:51 PM

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

5.2 Energy by Land Use - NaturalGas

	NaturalGa s Use	ROG	NOx	8	802	Fugitive PM10	Echaust PM10	PM10 Total	Fugitive PM2.5	Echaust PM2.5	PM2.5 Total	Bio- CO2	Bio-CO2 NBio-CO2 Total CO2	Total CO2	CH4	NZO	0000
Land Use	KBTUŊr					lb/day	ау							/ep/qi	ay		
Station	8.99564	0.0970	0.8819	0.7408	5.2900a- 003		0.0870	0.0670		0.0870	0.0670		1,058.310	0 0.0203	0.0203	0.0194	1,084,599
Total		0.0970	0.8819	0.7408	5.2900e- 003		0.0670	0.0670		0.0670	0.0670		1,058.310	1,058.310 1,058.310 0.0203	0.0203	0.0194	1,064.599

6.0 Area Detail

6.1 Mitigation Measures Area

Use Low VOC Paint - Non-Residential Interior

Use Low VOC Paint - Non-Residential Exterior

CalEEMod Version: CalEEMod.2016.3.2

Page 21 of 23

Date: 5/20/2020 12:51 PM

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

C02e		1.8700a- 003	1.8700e- 003
NZO			
CH4	ay	0.000.0	0.000.0
Total CO2	(Epique	1.7500e- 0.0 003	1.7500e- 003
Bio-CO2 NBio-CO2 Total CO2		1.7500e- 003	1.7500e- 003
Bio- CO2			
PM2.5 Total		0.0000	0.0000
Exhaust PM2.5		0.000.0	0.0000
Rugitive PM2.5			
PM10 Total		0.0000	0.0000
Exhaust PM10	tary	0.0000	0.0000
Fugitive PM10	lb/day		
802		0.0000	0.0000
co		8.2000e- 004	8.2000e- 004
NOx		1.0000e- 005	1.0000e- 005
ROG		2.2577 1.0000e 8.2000e	2.2577
	Category	регебим	

6.2 Area by SubCategory

Unmitigated

1,0000e- 8,2000e- 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,00000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,00000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,00000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,00000 0,000 0,000 0,000 0,0000 0,000 0,000 0,000 0,000 0,000 0,000 0,000 0,000 0,000 0,000	Total	
1,0000e- 8,2000e- 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,00000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,00000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,0000 0,00000 0,000 0,000	lb/day	
1,0000e- 8,2000e- 0,0000 0,000	000000	00000
8.2000s- 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000	000000	00000
8.2000e- 0.0000 0.0000 0.0000 0.0000	00 1.7500e- 1.7500e- 0.0000 003 003	1.87008-
	00 1.7500e- 1.7500e- 0.0000 003 003	1.8700e- 003

CalEEMod Version: CalEEMod.2016.3.2

Page 22 of 23

Date: 5/20/2020 12:51 PM

Bloomington Air Quality Study - South Coast AQMD Air District, Summer

6.2 Area by SubCategory

Mitigated

				4	4
800		00000	00000	1.8700e- 003	1.8700e- 003
8					
CH4	sk.			0.0000	0.0000
Total CO2	Ibday	0.0000	0.0000	1.7500e- 003	1.7500e- 003
Bio-CO2 NBio-CO2 Total CO2				1.7500e- 003	1.7500e- 003
BIO- CO2			 		
PM2.5 Total		00000	00000	0.0000	0.0000
Exhaust PM2.5		0.000.0	0.0000	0.0000	0.0000
Puglitive PM2.5					
PM10		00000	00000	0.0000	0.0000
Exhaust PM10	tay .	0.0000	0.0000	0.0000	0.0000
Fugitive PM10	Ib/day		 		
800				0.0000	0.0000
8				8.2000e- 004	8.2000e- 004
ŏ				1.0000e- 005	1.0000e- 005
8		0.2567	2.0010	8.0000e- 005	2.2577
	SubCategory	Architectural Coating	Consumer Products	Landscaping	Total

7.0 Water Detail

7.1 Mitigation Measures Water

Install Low Flow Bathroom Faucet

Install Low Flow Kitchen Faucet

Install Low Flow Toilet

Use Water Efficient Irrigation System

8.0 Waste Detail

8.1 Mitigation Measures Waste

9.0 Operational Offroad

CalEEMod Version: CalEEMod.2016.3.2	1.2016.3.2		Page 23 of 23		Date:	Date: 5/20/2020 12:51 PM
	Bloom	ington Air Quality Stu	Bloomington Air Quality Study - South Coast AQMD Air District, Summer	MD Air District, Sum	mer	
Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type
10.0 Stationary Equipment	ı					
Fire Pumps and Emergency Generators	enerators					
Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type
Boilers						
Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type	
User Defined Equipment						
Equipment Type	Number					
11.0 Vegetation						